
M18 Ultrasonic Double Sheet Detection Sensor

BUDS-M18-6.0-Z8Y series · Sensing Distance: 20...60mm · Transducer Freq.: 200k Hz

IP65
Ingress Protection

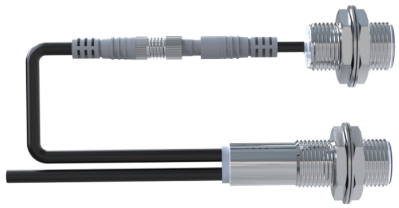

KEY SPECIFICATIONS

SENSING DISTANCE **20...60mm**	TRANSDUCER FREQ. **200k Hz**
AMBIENT TEMP. **+5°C...+60°C**	HOUSING **M18*1mm**
INGRESS PROTECTION **IP65**	

MODEL CODES


Output Type	Model Code
NPN N.O+N.C	**BUDS-M18-N316.0-Z8Y** SKU 10105199
PNP N.O+N.C	**BUDS-M18-P316.0-Z8Y** SKU 10105200

TECHNICAL DATA

Exterior structure	M18*1mm
Sensing distance	20...60mm
Target object material	Papers with weights of 50-1200g/m², Washi, metal-laminated sheets, self-adhesive films
Design	Cylindrical M18 ultrasonic wave transducer
Operating mode	Double sheet control
Detection method	Pulse operation with amplitude evaluation
Transducer frequency	200k Hz
Blind zone	5mm in front of emitter and receiver
Operating voltage	20...30VDC, reverse polarity protection
Ripple voltage	±10%
No-load current	≤60mA
Connection method	2m PUR cable, 7*0.25mm²
Cable	Emitter: 1.2m PVC cable, cable between M8 connector and receiver: 1.2m PVC
Output	NPN/PNP output; Imax=200mA, Voltage drop 2V, short circuit protection
Output logic	No paper status: white wire OFF, black wire OFF; Single status: white wire ON, black wire OFF; Double/multiple status: white wire OFF, black wire ON

Response time	Automatic running mode: 6.5ms
Power-on delay	<1.9s
Gap between emitter and receiver	20...60mm; optimal: 40mm±5mm
Permissible tilting angle	Within ±45° from the sheet perpendicular
Housing material	Brass, nickel-plated
Ultrasonic transducer	PU foam, glass filled epoxy resin
Max. tightening torque of nuts	M18: 15Nm
Ingress protection (EN 60529)	IP65
Operating temperature	+5°C...+60°C
Storage temperature	-40°C...+85°C
Control input	Control input: C1 to C3
Control description	←V+6V: Logic 1(control input terminal-v or idle)
Range setting	Teaching by control input
Indicator light	Green: single sheet; green flash: teaching; red: double/multiple sheets; red flash: no paper

DIMENSIONAL DRAWINGS



All dimensions in mm.